

INVESTIGATION OF DRYING BEHAVIOR OF WOOL BASED YARN BOBBINS

Erhan AKYOL¹, Ugur AKYOL², Kamil KAHVECİ¹, Ahmet CİHAN¹

¹ *Trakya University, Faculty of Engineering and Architecture, Department of Mechanical Engineering, Edirne, Turkey*

² *Namık Kemal University, Faculty of Çorlu Engineering, Department of Mechanical Engineering, Çorlu, Tekirdağ, Turkey*

erhanakyol@trakya.edu.tr

Abstract

In this study, the drying behavior of wool based yarn bobbins was simulated by empirical and semi-empirical drying models available in the literature. For this purpose, firstly, experimental drying behavior of wool bobbins was determined on an experimental bobbin dryer setup which was designed and manufactured based on hot-air bobbin dryers used in textile industry. Then, drying models considered were fitted to the experimental data. The fit was performed by selecting the values for constants in the models in such a way that these values make the sum of the squared differences between the experimental and the model results for moisture ratio minimum. Suitability of fitting was specified as comparing the correlation coefficient, standard error and mean square deviation. Results show that the most appropriate model in describing the drying curves of wool based yarn bobbins is the Page model. The results also show that the drying temperature has a significant effect on drying.

Key words: Drying, Bobbin, Wool, Modeling

1. Introduction

Inevitable after most dyeing or/and finishing processes, drying is a time consuming, energy intensive and expensive process and constitutes one of the major cost elements among the textile finishing operations. Thermal processes are widely used in textile industry; consist of passing a hot air stream over the surface of the material to be dried. Air flow transfers heat to the material by forced convection, and at the same time, carries away evaporated water. The process continues until equilibrium is attained, depending upon drying air temperature and humidity.

Many studies are presented on the investigation of heat and mass transfer processes and diffusion mechanisms in textile fibers in literature [1-4] and some of them are concerned with textile bobbins. For example in a theoretical study performed by Akyol et al. (2010) an inverse heat transfer problem was solved in order to determine effective thermophysical properties of a wool bobbin exposed to convective drying [5]. In a study Ribierio and Ventura (1995) reported on an experimental investigation to study drying of wool bobbins by hot air [6]. Lee et al. (2002) developed a transient two dimensional mathematical model to simulate the through-air drying process for tufted textile materials [7]. Li and Zhu (2003) studied an improved model of liquid water transfer coupled with moisture and heat transfer in porous textiles by analyzing the physical model of liquid diffusion in porous textiles [8].

The aim of this study is to simulate drying behavior of wool based yarn bobbins by empirical and semi-empirical drying models available in the literature.

2. Materials and Methods

The experiments were carried out with samples of totally 8 wool based (65% wool and 35% orlon) yarn bobbins with hollow cylindrical shapes with the dimensions of 153 mm bobbin height, and approximately 33 mm inner radius and 90 mm outer radius. The dry weight of one wool based bobbin was approximately 1060±20g. The bobbins were dried with air at 80°C, 90°C and 100°C temperatures at a constant 2 bar effective pressure.

The experiments were conducted in a pressurized hot-air bobbin dryer as shown in Fig.1. Ambient air was directed to an electrical heater with the maximum power of 25 kW by a centrifugal fan and the air pressure was supplied by a compressor with a nominal power of 15 kW. After the heater, air enters to a bobbin carrier system where the bobbins are dried. The carrier consists of four parts and two bobbins can be placed at each part. So totally, 8 bobbins can be placed in the carrier. In the carrier hot air is passed from inside to the outside of bobbins in radial direction. After carrier, drying air firstly enters to a cooling exchanger. The purpose of this process is to reduce relative humidity of the air. Afterwards, drying air enters to a separator. In the separator, water droplets hanging on the air are separated from the air. Drying air finally returns to the fan. The carrier has been placed on a loadcell with an accuracy of ± 1 g. The conditions of air at different points in the carrier and weights of the bobbins can be monitored by a software program, and the process can be controlled by an automatic control system in the experimental setup.

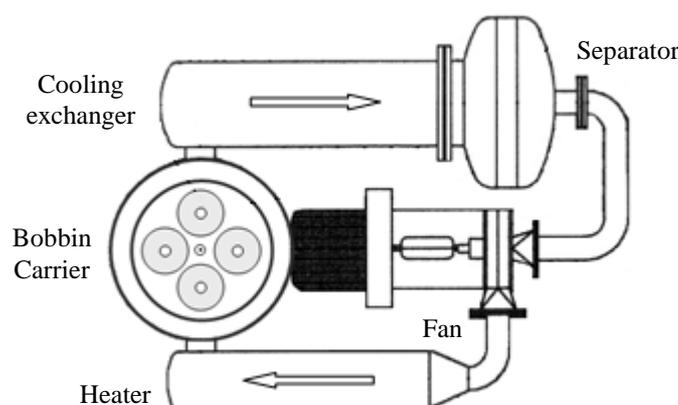


Figure 1. Schematic view of the experimental bobbin dryer

3. Mathematical Formulation

Four different empirical or semi-empirical drying models given in Table 1 have been taken into account for determining the most appropriate model for the drying simulation of wool based yarn bobbins.

Table 1. Drying models

Name	Model equation	References
Page [9]	$mr = \exp(-kt^n)$	Page (1949)
Henderson and Pabis [10]	$mr = a \exp(-kt)$	Henderson and Pabis (1969)
Geometric [11]	$mr = at^{-n}$	Cihan et al. (2007)
Wang and Singh [12]	$mr = 1 + at + bt^2$	Wang and Singh (1978)

mr in the drying models is the moisture ratio defined as:

$$mr = \frac{m - m_e}{m_o - m_e} \quad (1)$$

Here m , m_o , m_e are the instantaneous, initial and equilibrium moisture contents, respectively. The coefficient of correlation (r) is one of the primary criteria for selecting the best equation. In addition to correlation coefficient, standard deviation (e_s) and mean squared deviation (χ^2)

are used to determine suitability of the fit. These parameters are defined as follows (Chapra and Canale, 1989) [13]:

$$r = \frac{n_o \sum_{i=1}^{n_o} mr_{pre,i} mr_{exp,i} - \sum_{i=1}^{n_o} mr_{pre,i} \sum_{i=1}^{n_o} mr_{exp,i}}{\sqrt{n_o \sum_{i=1}^{n_o} (mr_{pre,i})^2 - \left(\sum_{i=1}^{n_o} mr_{pre,i}\right)^2} \sqrt{n_o \sum_{i=1}^{n_o} (mr_{exp,i})^2 - \left(\sum_{i=1}^{n_o} mr_{exp,i}\right)^2}} \quad (2)$$

$$e_s = \sqrt{\frac{\sum_{i=1}^{n_o} (mr_{pre,i} - mr_{exp,i})^2}{n_o}} \quad (3)$$

$$\chi^2 = \frac{\sum_{i=1}^{n_o} (mr_{pre,i} - mr_{exp,i})^2}{n_o - n_c} \quad (4)$$

where $mr_{pre,i}$ is the i th predicted moisture ratio, $mr_{exp,i}$ is the i th experimental moisture ratio, n_o is the number of observations and n_c is the number of constants in drying model.

4. Results and Discussion

Curve fitting computations were carried on the 4 drying models given in Table 1 relating the drying time and moisture ratio. The results for the drying temperatures taken into consideration are given in Tables 2-4. Experiments were carried out for drying temperatures of 80, 90 and 100°C, effective pressure of 2 bar and a modest air velocity. The acceptability of the drying model is based on a value for the correlation coefficient r , which should be close to 1, and low values for the standard error e_s and the mean squared deviation χ^2 . The results show that the most appropriate model in describing the drying curves of wool based yarn bobbins is the Page model, with a minimum r of 0.9976, with a maximum e_s of 2.06×10^{-2} , and with a maximum χ^2 of 5.46×10^{-4} . Wang and Singh and Henderson and Pabis models are other acceptable models. Among the models considered here, the geometric model appears to be the worst fit.

Table 2. Fit results for drying temperature T=80°C.

Model	Coefficients	r	e_s	χ^2
Page	k=0.59, n=1.27	0.9995	9.59×10^{-3}	1.11×10^{-4}
Hend. and Pabis	k=0.69, a=1.05	0.9939	3.38×10^{-2}	1.37×10^{-3}
Geometric	a=0.44, n=0.08	0.6529	2.20×10^{-1}	5.79×10^{-2}
Wang and Singh	a=-0.52, b=0.07	0.9998	1.02×10^{-2}	1.25×10^{-4}


Table 3. Fit results for drying temperature T=90°C.

Model	Coefficients	r	e _s	χ^2
Page	k=0.69, n=1.35	0.9996	9.04×10^{-3}	1.02×10^{-4}
Hend. and Pabis	k=0.80, a=1.06	0.9916	3.98×10^{-2}	1.98×10^{-3}
Geometric	a=0.45, n=0.08	0.6727	2.19×10^{-1}	5.97×10^{-2}
Wang and Singh	a=-0.56 b=0.07	0.9991	1.33×10^{-2}	2.20×10^{-4}

Table 4. Fit results for drying temperature T=100°C.

Model	Coefficients	r	e _s	χ^2
Page	k=0.78, n=1.36	0.9976	2.06×10^{-2}	5.46×10^{-4}
Hend. and Pabis	k=0.88, a=1.07	0.9888	4.53×10^{-2}	2.63×10^{-3}
Geometric	a=0.44, n=0.08	0.6709	2.19×10^{-1}	6.18×10^{-2}
Wang and Singh	a=-0.62, b=0.09	0.9957	2.91×10^{-2}	1.09×10^{-3}

The drying curves based on the Page model are shown in Figs. 2-4 along with the experimental moisture ratios. As it can be seen from the figures, moisture removal is fast at the beginning of the drying process, and the drying rate slows down considerably as the drying proceeds. As it can also be observed from the figures, the temperature of drying air has a significant effect on the drying rate.

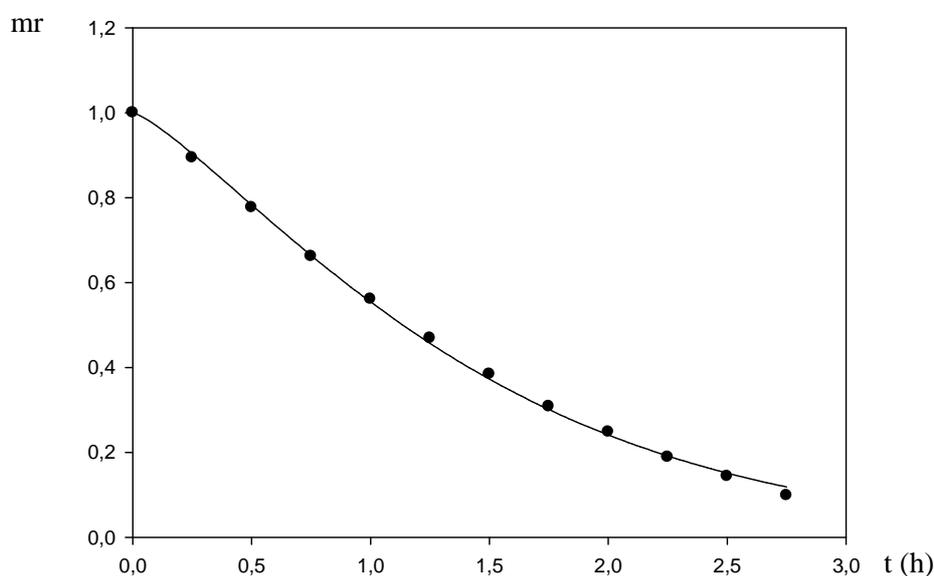**Figure 2.** Drying curve for drying temperature T=80°C.

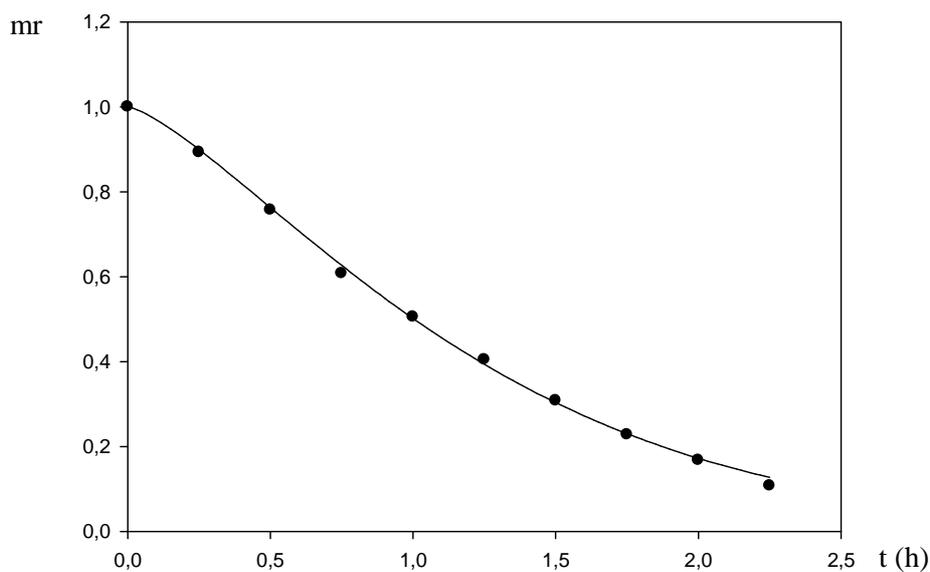


Figure 3. Drying curve for drying temperature $T=90^{\circ}\text{C}$.

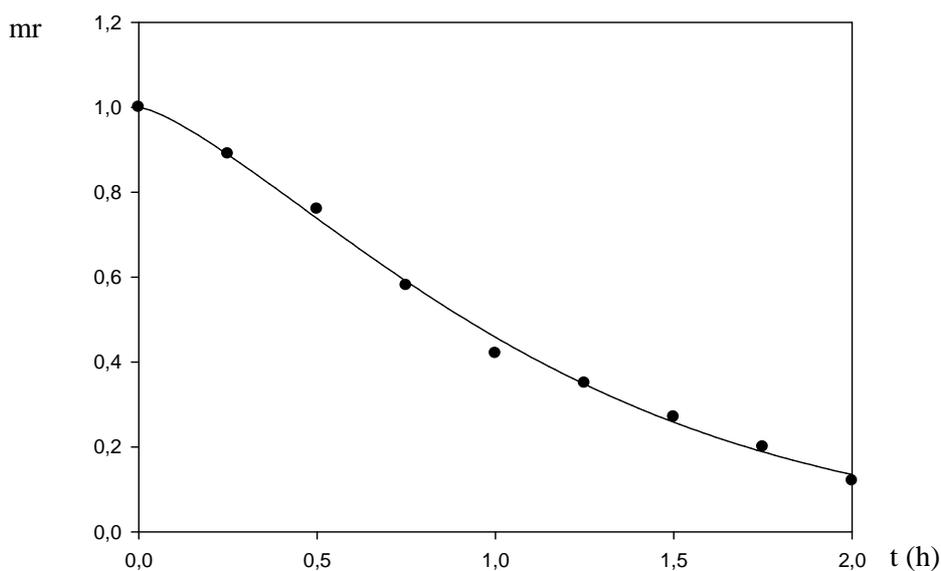


Figure 4. Drying curve for drying temperature $T=100^{\circ}\text{C}$.

5. Conclusion

In this study, the drying behavior of wool based yarn bobbins was simulated by empirical and semi-empirical drying models available in the literature. The results show that the most appropriate model in describing the drying curves of wool based yarn bobbins is the Page model, with a minimum r of 0.9976, with a maximum e_s of 2.06×10^{-2} , and with a maximum χ^2 of 5.46×10^{-4} and drying air temperature has a significant effect on the drying rate.

Acknowledgement

The authors acknowledge the support received from TŮBĪTAK.

6. References

1. Y. Li and Q. Zhu, *Numerical Heat Transfer, Part A*, 43, 2003, 501-523.
2. J.P. Fohr, D. Couton and G. Treguier, *Textile Research Journal*, 72, 1, 2002, 1-12.
3. P.W. Gibson and M. Charmchi, *International Communications in Heat and Mass Transfer*, 24, 5, 1997, 709-724.
4. Y. Li, Q. Zhu and K.W. Yeung, *Textile Research Journal*, 72, 5, 2002, 435-446.
5. U. Akyol, A. Cihan and R. Shaliyev, *Inverse Problems in Science and Engineering*, 18, 2, 2010, 227-240.
6. J. Ribeiro and J.M.P. Ventura, *Drying Technology*, 13, 1-2, 1995, 239-265.
7. H.S. Lee, W.W. Carr, H.W. Beckham and J. Leisen, *International Journal of Heat and Mass Transfer*, 45, 2002, 357-366.
8. Y. Li and Q. Zhu, *Textile Research Journal*, 73, 6, 2003, 515-524.
9. G. Page, *Factors influencing the maximum rates of air-drying shelled corn in thin layers*, M.S. Dissertation, Lafayette, in Purdue University, 1949.
10. S.M. Henderson and S. Pabis, *Journal of Agricultural Engineering Research*, 6, 3, 1961, 169-174.
11. A. Cihan, K. Kahveci and O. Hacıhafizoğlu, *Journal of Food Engineering*, 79, 1, 2007, 293-298.
12. C.Y. Wang, R.P. Singh, *ASAE Paper No. 78-3001*, 1978.
13. S.C. Chapra, R.P. Canale, *Numerical Methods for Engineers*, McGraw-Hill, 1989.